


LITHO LABELING SYSTEMS

*For spot and full mounting
to sheets and knocked-down boxes.*



From
Automatän

Automatån Litho laminating offers profit opportunities

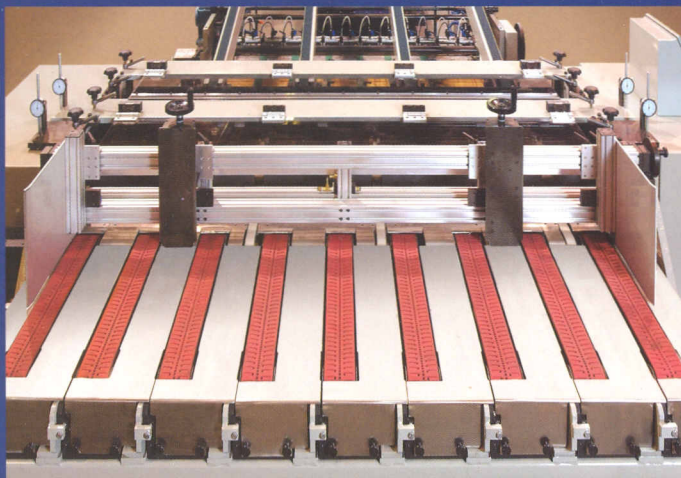


Board Feeder

Lead edge vacuum feed. Independent servo driven vacuum belts ensure accurate and consistent substrate feeding.

Touch Screen Control Panel

Operator friendly touch screen control panel. Technical support and program updates via modem connection.

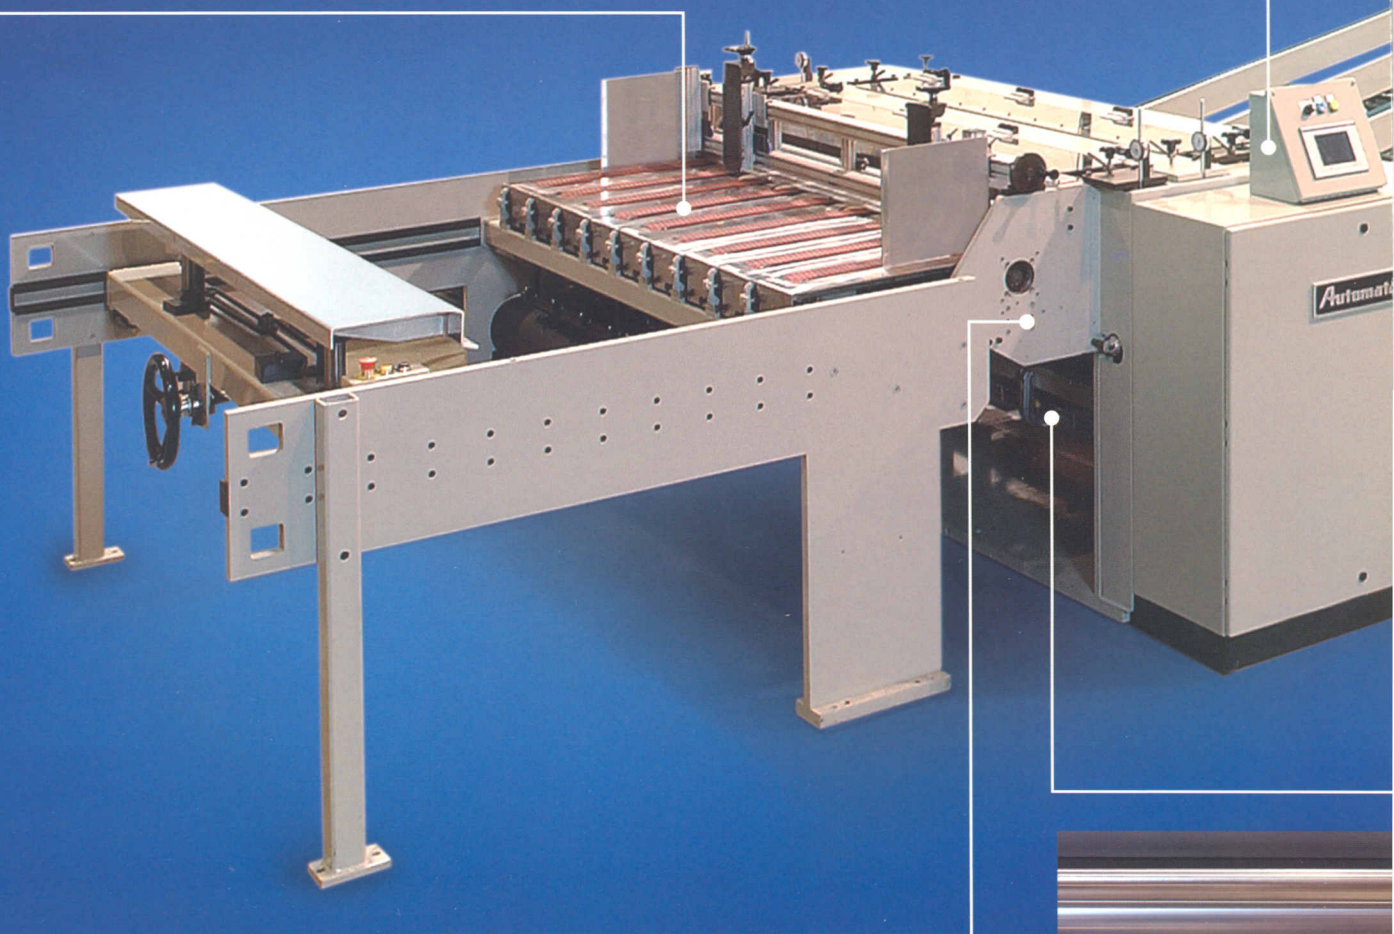

Electrostatic Method Adhesive Application System*

No mat material required. Even glue coverage with no glue voids or excessive glue lay-down. Complete control of the litho sheet for precise registration.

* Patent Pending





Automatän Litho laminating offers key advantages

Litho Sheet Preload System

Moveable air-deck allows litho sheets to be staged for rapid change-over.

Litho sheet pile is air floated and moves with fingertip pressure.

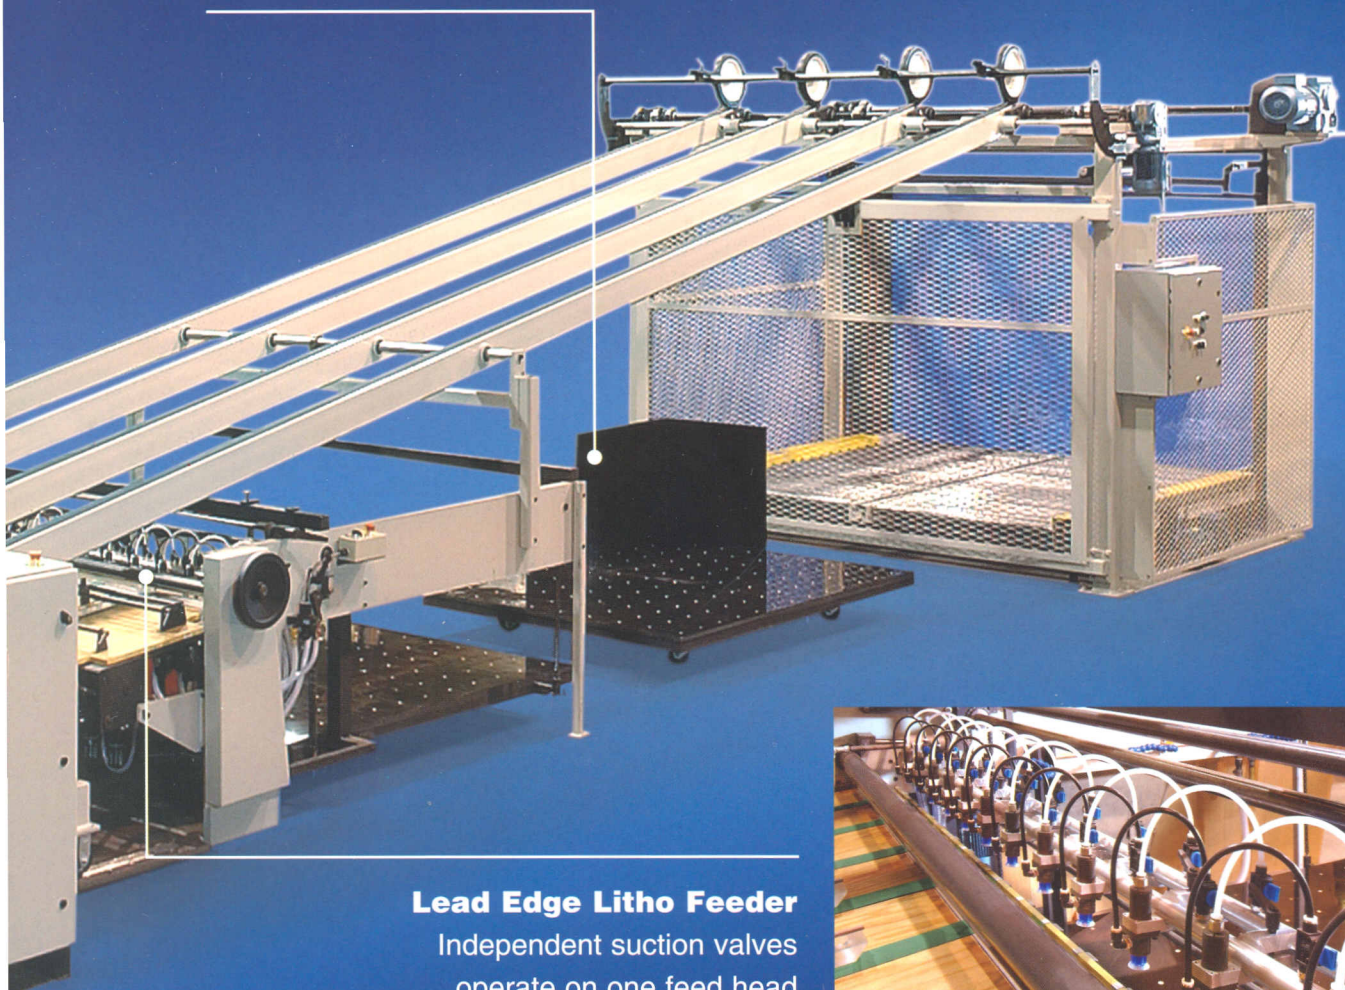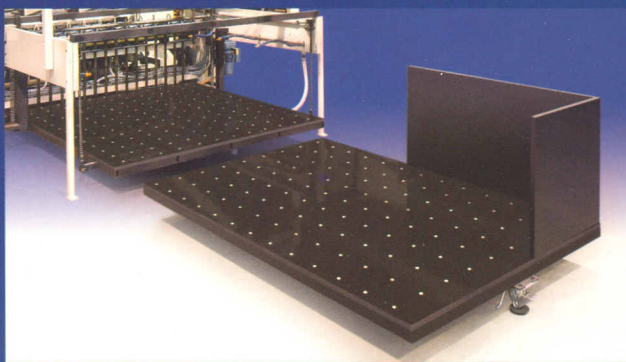

Lead Edge Litho Feeder

Independent suction valves operate on one feed head providing fast set-up times and consistent feeding of litho sheets.



Automatän Vacuum and Band Roll System

Proven Automatän vacuum cylinder and band roll allow for accurate label transfer without glue lines or glue build up.

Automatän Model EM Litho Labeler

- *Largest Format Machine Available*
- *Quick Change Over*
- *Precise Registration*
- *Excellent Glue Coverage*
- *Operator Friendly*
- *Superior Quality*


Automatän Model EM

Automatän Model EM

Automatän Model EM

Automatän Model EM

Specifications

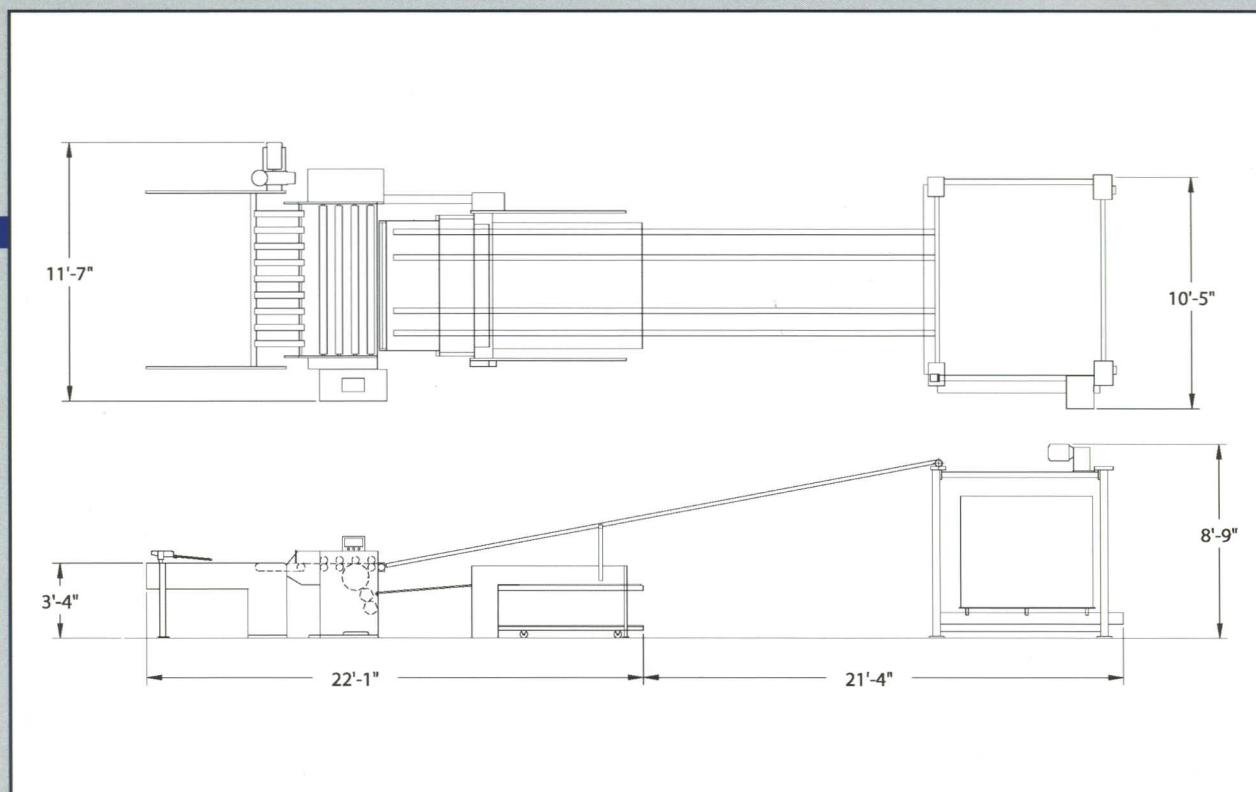

Model EM Litho Label Laminator

Format Sizes	Label	Board
Minimum	10" x 6" (250 x 150mm)	20" x 16" (500 x 400mm)
Maximum	39" x 65" (990 x 1650mm)	40" x 80" (1070 x 2030mm)
With Skip Feed	82" x 65" (2080 x 1650mm)	84" x 80" (2130 x 2030mm)
With Double Skip Feed		120" x 80" (3050 x 2030mm)

Specifications: Through machine direction x across machine direction. Subject to change without notice.

Machine Weight	Power Requirements	Air Requirements
24,000 lbs (10,900 kg)	480 Volt 100 Amp.	80 psi Minimum Air Supply

A recognized leader in the industry, Automatän has been producing labelers for over 25 years, with hundreds of installations around the world. Consistently high quality technical support from Automatän's team of trained technicians based in Central Wisconsin is ensured through the design of our service program. Our commitment to the success of our equipment users is at the heart of Automatän's leadership role in point-of-purchase graphics.

To Create High-Profit Opportunities, Contact:

Automatän

P.O. Box 670 • Plover, Wisconsin 54467 • USA
715-341-6501 • Fax: 715-345-1004




Web site: www.automatan.com • e-mail: info@automatan.com

Automatän is a
registered trademark of
Automatän Incorporated.

The leading supplier of sheet-to-sheet labeling equipment offers a versatile laminator ideal for short run productivity.

MODEL EM

LITHO LABELING SYSTEM

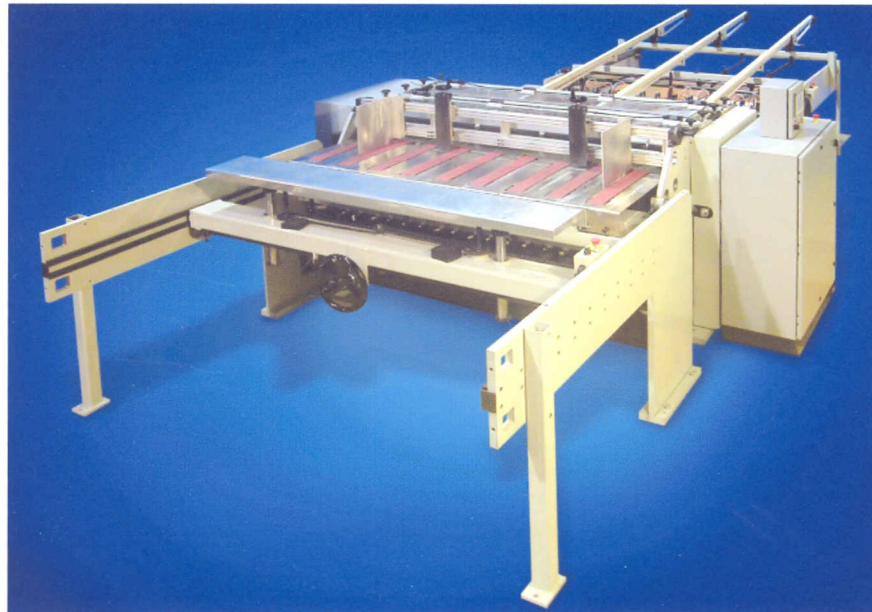

For spot and full mounting to sheets and knocked-down boxes.

The Automatän® Model EM is designed as a "quick changeover" labeler allowing for the ability to run short and long production quantities in an efficient manner, while adding litho quality value to corrugated boxes and displays.

The Automatän® EM offers advanced technology and features the new electrostatic method of glue application.* By inducing an electrical charge into the label at its contact with an applicator roll, the EM design minimizes set-up while assuring precise, even glue application.

* PATENT PENDING

Designed for versatility, the EM runs small format sizes, as well as, the largest format size available. Cycle speed is 3,000 per hour. Precision registration is +/- .040" (1mm).

The Model EM is designed for developing new graphics business or maintaining existing business with the competitive edge offered by spot labeling. Litho labeling is a proven, successful, low investment way to provide the high quality appeal and quick-change dynamics necessary to move product in today's superstores.

Automatän

Innovative equipment for packaging and printing industry leaders.

Automatän EM / Automatän EM / Automatän EM / Automatän EM / Automatän EM / Automatän EM

Product Specifications		
	LABEL	BOARD
Minimum	10" x 6" (250 x 150mm)	20" x 16" (500 x 400mm)
Maximum	39" x 65" (990 x 1650mm)	40" x 80" (1070 x 2030mm)
with skip feed	78" x 65" (1980 x 1650mm)	80" x 80" (2030 x 2030mm)
with double skip feed		120" x 80" (3050 x 2030mm)
Thickness	.003"-.012" (0.075 - 0.30mm)	.060"-.750" (1.50 - 20mm)

Specifications: Through machine direction X across machine direction. Subject to change without notice.

Machine Weight	Power Requirements	Air Requirements
14,000 lbs (6350kg)	460 Volt 100 Amp.	80 psi Minimum Air Supply

To create high profit opportunities, contact:

Automatän

P.O. Box 670 • Plover, Wisconsin 54467 USA • Tel: 715-341-6501 • Fax: 715-345-1004
e-mail: info@automatan.com • web site: www.automatan.com